


Remark: customized frame color and cable length available upon request

TOPCon 191.6R1SB

600-620W

STM-600-620/144-R1SB

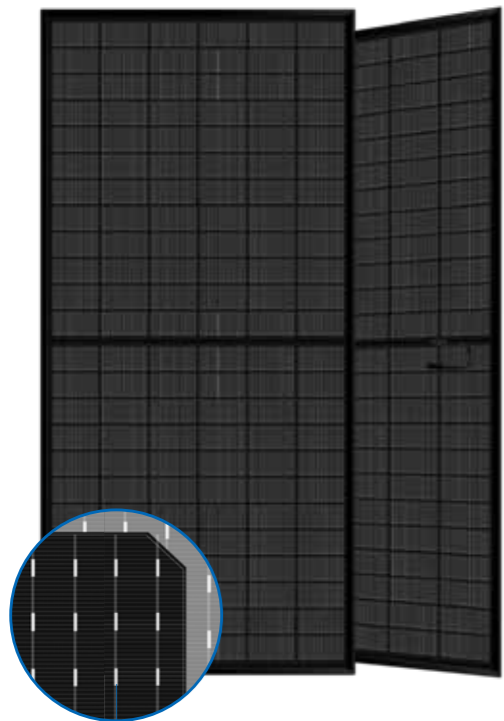

Double-sided cell technology

Higher power output **23.0%** up to

PID Resistance



Low-light Performance



Severe Weather Resilience



Durability Against Extreme Environmental Conditions



Double-sided power generation




12
YEARS

12-year Warranty for Materials and Processing

30
YEARS

30-year Warranty for Extra Linear Power Output

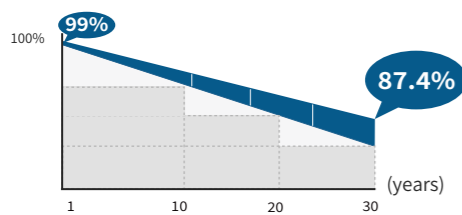

ISO 9001:2015
 ISO 14001:2015
 ISO 45001:2018
 GB/T 29490-2013



Packaging(pcs/40HQ container)	13 meter semi hanging	Dimensions	Weight
31/620pcs 37/740pcs	31/620pcs 37/740pcs	2382x1134x35(30)mm	33.6kg±3%

MECHANICAL SPECIFICATION		OPERATING PARAMETERS	
Cell	N-type mono-crystalline	Maximum System Voltage	1500VDC
No. of cells	144(6x24)	Operating Temperature	-40°C~+85°C
Cable Length	300mm(+)/300mm(-)	Maximum Series Fuse	25A
Cable Cross Section Size	4mm ² (IEC)	Maximum StaticLoad,Front	5400Pa(112lb/ft ²)
Junction Box	IP68,3 diodes	Maximum StaticLoad,Back	2400Pa(50lb/ft ²)
Connector	MC4 Compatible	Safety Class	Class II
STC:AM1.5 1000W/m ² 25°C NOCT:AM1.5 800W/m ² 20°C 1m/s		Test Uncertainty for Pmax ±3%	

Module Type	STM-600/144-R1SB		STM-605/144-R1SB		STM-610/144-R1SB		STM-615/144-R1SB		STM-620/144-R1SB	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power(Pmax/W)	600	455	605	459	610	462	615	466	620	470
Open Circuit Voltage(Voc/V)	52.19	49.58	52.34	49.72	52.49	49.87	52.64	50.01	52.79	50.15
Short Circuit Current(Isc/A)	14.55	11.74	14.61	11.79	14.67	11.84	14.73	11.89	14.79	11.94
Voltage at Maximum Power(Vmp/V)	43.84	41.51	44.01	41.68	44.18	41.86	44.35	42.03	44.51	42.20
Current at Maximum Power(Imp/A)	13.69	10.96	13.75	11.00	13.81	11.05	13.87	11.09	13.93	11.14
Module Efficiency(%)	22.20		22.40		22.60		22.80		23.00	

TEMPERATURE RATINGS		POWER OUTPUT OF THE FRONT AND REAR SIDE					
Normal Operating Cell Temperature(NOCT)	45±2°C	(REFERENCEDSPECIFICALLY TO 600WP FRONT)					
Temperature Coefficient of Isc	+0.045%/°C	Power Gain (%)	5%	10%	15%	20%	25%
Temperature Coefficient of Voc	-0.275%/°C	Maximum Power(Pmax/W)	630	660	690	720	750
Temperature Coefficient of Pmax	-0.350%/°C	Pmax Gain(%)	23.30%	24.40%	25.50%	26.60%	27.70%

I-V CURVE(STM-600-620/144-R1SB)

